

MILD STEEL

PART NO.	A	B	C	WT.
AS-18	18"	12"	36"	132
AS-23	23"	12"	36"	152
AS-2317	23"	17"	36"	175
AS-35	35"	12"	36"	204
AS-25	25"	13"	41"	155
AS-25M	25"	13"	41"	175



- 3/16" mild steel
Steel hinge (full length and staked)
- Stainless steel hinge pins
- Vandal & weather resistant enclosure
NEMA 3R rainproof enclosure as listed
by Underwriters Laboratories, Inc.
- Pry resistant 1" flanged doors.
- Front door louvers with rain-guard shield.
- Neoprene weather striping (full door)
3/4" plywood or steel backboard
mounted with 4 steel bolts.
- Internal document tray inside door.
- Steel fabricated "Universal Mounting
Base" with zinc plated hardware.
- Limited warranty 5 years

Locking device options, stainless & mild steel

- single, dual or 3 point locking systems
- Key type handles
- Padlock mechanisms
- Combination style locks
- Slam latch & more

Optional Finishes

- Powder coating - standard
- Painting - optional

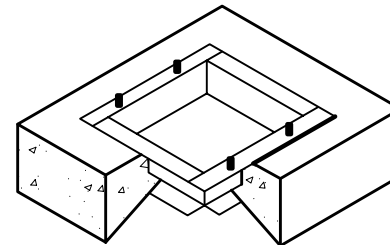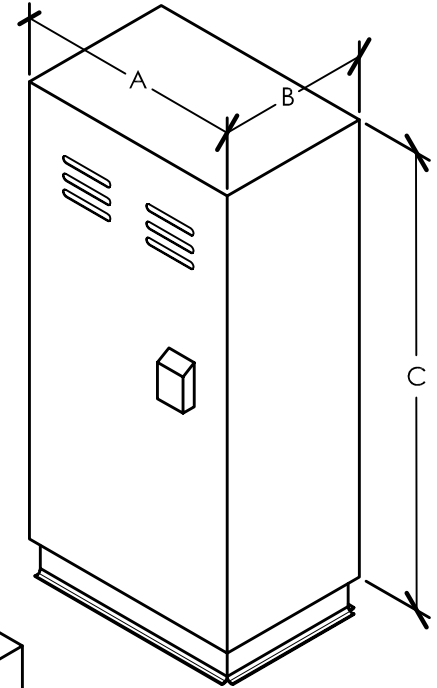

POUR IN PLACE WITH CUTAWAY
UNIVERSAL MOUNTING BASE

PLOT DATE: 06-20-06