



STAINLESS STEEL

PART NO.	A	B	C	WT.
ASTO-SS-16	16"	15 1/2"	38"	105
ASTO-SS-18	18"	15 1/2"	38"	126
ASTO-SS-24	24"	15 1/2"	38"	148

- Enclosure construction - 100% 12 gauge 304 stainless steel #4 polish finish.
- 3 point heavy-duty internal stainless steel locking system
- Industrial rated keyed lock
- Offset louvers for cross ventilation
- Dual gas plungers to assure easy access to top mount design.
- Stainless steel door and lid hinges & pins (staked)
- Stainless steel or 3/4" plywood mounting panel
- Universal sloped mounting shelf, customized to fit all controllers.
- Safety door holder
- Full door gasket seal
- Steel fabricated Universal Mounting Base with stainless steel nuts, bolts & washers.
- Limited warranty, 15 years

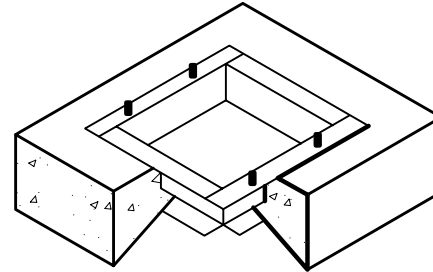

Universal Mounting Base ("Cutaway")
Custom Sized to "Enclosure Dimensions"

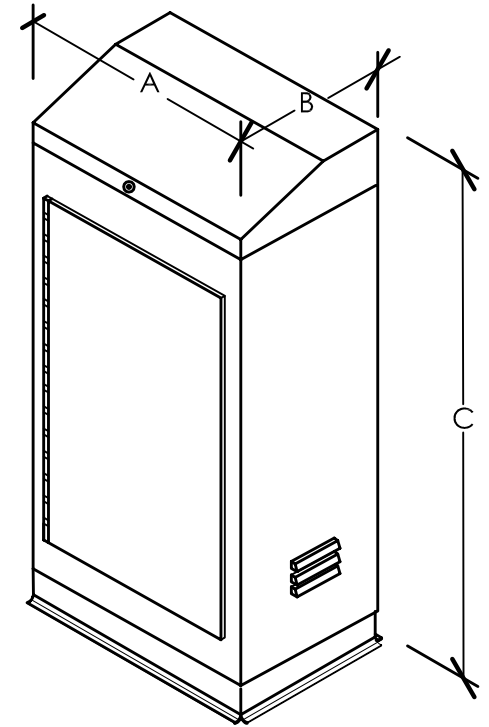

NOTE:

1. This series is only offered in stainless steel but can be made from mild steel. Please consult All-Spec for custom applications.
2. All - Spec enclosures provide the maximum protection against forced entry, with a locking system that is virtually impregnable to pulling, punching, drilling, and any other physical attack.

ALL-SPEC TOP MOUNT EASY ACCESS CONTROLLER ENCLOSURE