


**WALL MOUNT ENCLOSURE-"front door opening"
MILD STEEL**

PART NO.	A	B	C	WT.
ASWM-8	8"	6"	8"	32
ASWM-12	12"	8"	12"	45
ASWM-18	18"	10"	18"	60
ASWM-20	20"	10"	16"	60
ASWM-24	24"	10"	24"	90
ASWM-26	26"	10"	26"	110

- 3/16" mild steel
- Steel hinge (full length & staked)
- Vandal & weather resistant enclosure is a NEMA 3R rainproof enclosure as listed by Underwriters Laboratories, Inc.
- Safeguard padlock shield.
- Pry resistant 1" flanged door
- Front door louvers with rain-guard shield
- Neoprene weather stripping (full door)
- 3/4" plywood or stainless backboard mounted with 4 stainless steel bolts.
- Document tray inside door.
- Limited warranty - 5 years

Locking device options, stainless & mild steel


- Single, dual or 3 point locking systems
- Key type handles
- Padlock mechanisms
- Slam latch & more



Installation notes: This enclosure has predrilled mounting holes on the back panels. Bolt enclosure to the wall or structure by using a Hilti, Red Head or other appropriate mounting bolt systems. The bottom of the enclosure has pre-drilled holes to accommodate electrical connections.

Finishes for both stainless & mild steel

- Powder coating - "optional" on stainless steel
- Powder coating - "standard" on mild steel
- Painting - optional

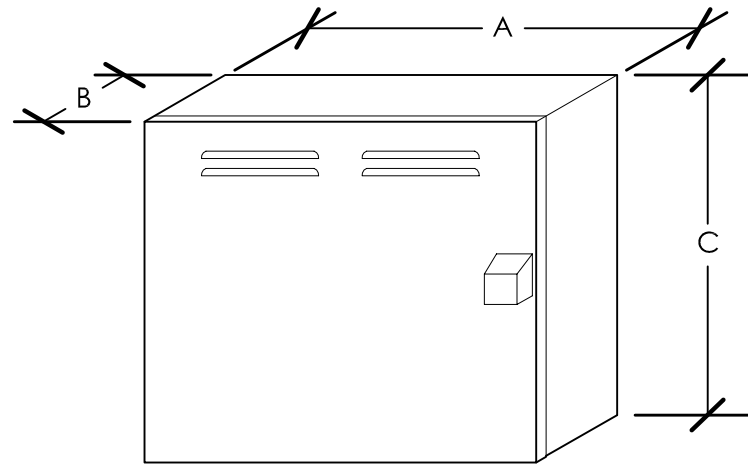

ALL-SPEC- WALL MOUNT ENCLOSURE-"front door opening"