


WALL MOUNT ENCLOSURE-"front door opening" STAINLESS STEEL

PART NO.	A	B	C	WT.
ASWM-SS-8	8"	6"	8"	24
ASWM-SS-12	12"	8"	12"	34
ASWM-SS-18	18"	10"	18"	45
ASWM-SS-20	20"	10"	16"	45
ASWM-SS-24	24"	10"	24"	68
ASWM-SS-26	26"	10"	26"	82

- 12 Gauge stainless steel type 304 non magnetic, with #4 finish
- Stainless steel hinge & pin (staked)
- Vandal & weather resistant enclosure is a NEMA 3R rainproof enclosure as listed by Underwriters Laboratories, Inc.
- Safeguard padlock shield
- Pry resistant 1" flanged door
- Front door louvers with rain-guard shield
- Neoprene weather stripping (full door)
- $\frac{3}{4}$ " plywood or stainless steel backboard mounted with 4 stainless steel bolts
- Document tray inside door.
- Limited warranty - 15 years

Locking device options, stainless & mild steel


- Single, dual or 3 point locking systems
- Key type handles
- Padlock mechanisms
- Slam latch & more



Installation notes: This enclosure has predrilled mounting holes on the back panels. Bolt enclosure to the wall or structure by using a Hilti, Red Head or other appropriate mounting bolt systems. The bottom of the enclosure has pre-drilled holes to accommodate electrical connections.

Finishes for both stainless & mild steel

- Powder coating - "optional" on stainless steel
- Powder coating - "standard" on mild steel
- Painting - optional

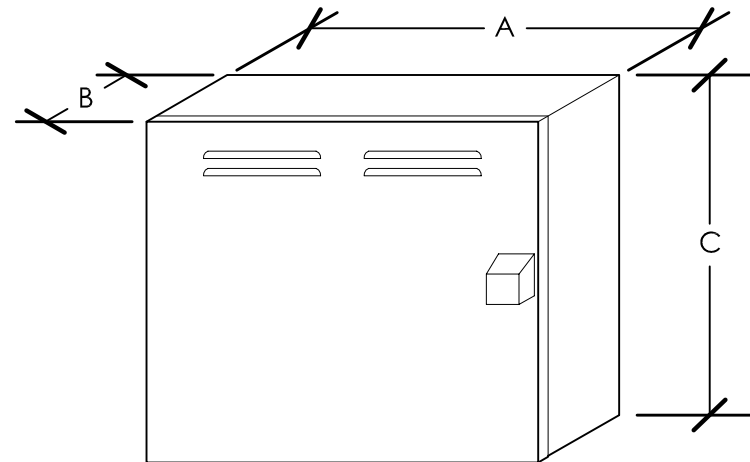

ALL-SPEC- WALL MOUNT ENCLOSURE-"front door opening"