

MILD STEEL

| PART NO. | A | B | C | WT. |
|----------|-----|-----|-----|-----|
| AS-18 | 18" | 12" | 36" | 132 |
| AS-23 | 23" | 12" | 36" | 152 |
| AS-2317 | 23" | 17" | 36" | 175 |
| AS-25 | 25" | 13" | 41" | 155 |
| AS-35 | 35" | 12" | 36" | 204 |


- 3/16" mild steel
- Steel hinge (full length and staked)
- Stainless steel hinge pins
- Vandal & weather resistant enclosure
- NEMA 3R rainproof enclosure as listed by Underwriters Laboratories, Inc.
- Pry resistant 1" flanged doors.
- Front door louvers with rain-guard shield.
- Neoprene weather striping (full door)
- 3/4" plywood or steel backboard mounted with 4 steel bolts.
- Internal document tray inside door.
- Steel fabricated "Universal Mounting Base" with zinc plated hardware.
- Limited warranty 5 years

Locking device options, stainless & mild steel

- single, dual or 3 point locking systems
- Key type handles
- Padlock mechanisms
- Combination style locks
- Slam latch & more

Optional Finishes

- Powder coating - standard
- Painting - optional

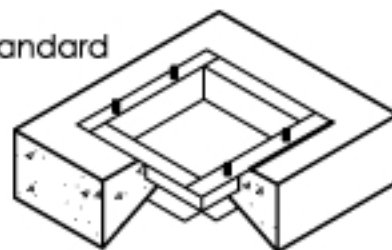

POUR IN PLACE WITH CUTAWAY
UNIVERSAL MOUNTING BASE

