


CAL-TRANS ENCLOSURE WITH VENTED ROOF
"single door-front opening"

MILD STEEL

PART NO.	A	B	C	WT.
ASCT	20"	12"	60"	184
ASCT-D	36"	12"	60"	204




- 3/16" Mild steel
- Steel hinge with stainless steel pin (full length/staked)
- Vandal & weather resistant enclosure is a NEMA 3R rainproof enclosure as listed by Underwriter's Laboratories, Inc.
- Safeguard - 3 point locking system
- Pry resistant 1" raised "flushed fit" door
- Vented roof with protective *fine mesh* screen between raised roof and enclosure to allow for air circulation and filtration
- Neoprene weather stripping (full door)
- 3/4" plywood backboard (marine grade ACX) mounted with 4 stainless steel bolts and painted to spec*.
- Document tray inside door.
- Steel fabricated "Universal Mounting Base" with zinc plated steel hardware.
- Limited warranty - 5 years

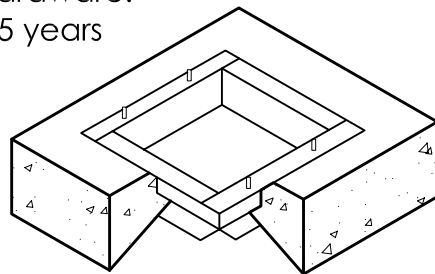

Universal Mounting Base ("Cutaway")
 Custom Sized to "Enclosure Dimensions"

* The backboard of the enclosure is painted to Cal-Trans Specification:
 2 coats of primer and 2 coats of white enamel painted over entire board, including edges.

Note: The Vented roof is raised 1" above the enclosure body and overlaps each of the four sides of the enclosure by 1 1/2" which promotes good air circulation. The Vented roof has 4 stainless steel bolts welded to the underside, which inserts through the screen frame into the holes in the enclosure where they are bolted into place. This allows for servicing & replacement of the screen if necessary.

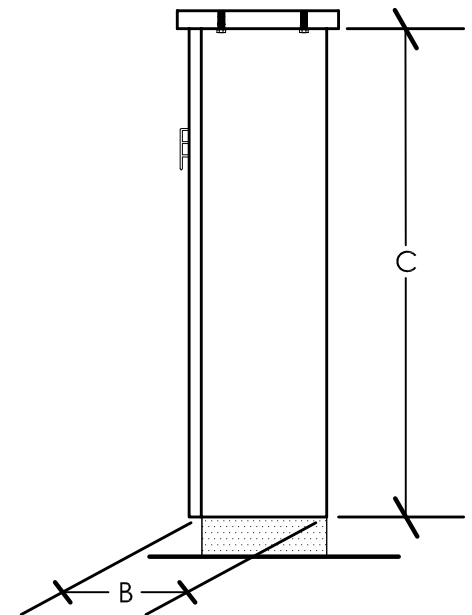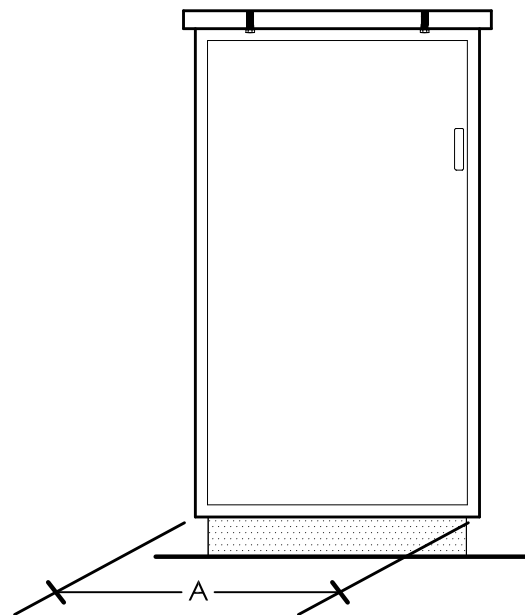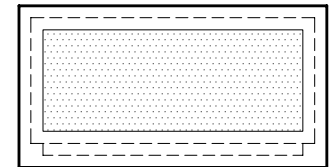

ALL-SPEC - CAL-TRANS ENCLOSURE WITH VENTED ROOF "single door-front opening"